

# DS-200 Commercial Roll-Up Door



Loading docks, outbuildings and large storage facilities are typical uses for the attractive appearance, sturdy construction, generous dimensions and long service life of DS-200 doors.

DS-200 roll-up doors are available in round or square profiles. The continuous curtains are made from hot-dipped galvanized steel, and then finished with silicone polyester paint for beauty and durability.

Installation to masonry, steel or wood jambs is quick, and simple—no special preparation, no overhead tracks.

Steel slide-bolt assemblies at each bottom corner secure the closed door from inside. For added protection, the slide-bolts also accept padlocks. A sliding curtain lock also is available for securing the door from outside.


DS-200 Commercial Roll-Up Steel Doors are available in a variety of standard and special colors. You get the doors you need with timely delivery and attractive pricing. Write, call or fax us for specifying/ordering information.



- 1** *Corrugated top sheet assembly* forms a strong torque cylinder for strength and easy operation, and conceals the spring mechanism.
- 2** *Corrugated door curtain*, available in round or square profile, is hot-dipped, galvanized 26-Ga. steel, primed then finished with high gloss silicone polyester paint.
- 3** *Polypropylene anti-wear strip and nylon strap* come factory installed on guide and curtain, providing quieter operation and longer service life.
- 4** *Cam-action spring tensioning* device allows easy adjustment of spring tension.
- 5** *Drum wheel* is deep-drawn galvanized steel with 1-5/16" steel bearings.
- 6** *Bottom bar assembly* includes heavy-duty steel angle, extruded aluminum bottom bar and replaceable bulb-type vinyl astragal.
- 7** *Slide-bolt assemblies* made of heavy-duty steel lock the closed door from inside at the bottom corners. For added security, both slide bolts accept padlocks. An exterior sliding curtain lock also is available.
- 8** *Roll-up door guides* are 14-Ga. galvanized steel, 2" wide. DS-200 guides install to masonry, steel or wood construction equally well.
- 9** *Automatic door stops* prevent door from rolling up past the header.
- 10** *Tempered steel springs* are engineered to counterbalance different door sizes and weights for smooth, easy operation and long service life. Both springs are clip-welded to the axle for correct location and extension.
- 11** *Heavy-duty steel axle* supports door curtain and counterbalance system.

Item 279085 02.10.

**20 Year Warranty Against Chalk and Fade**

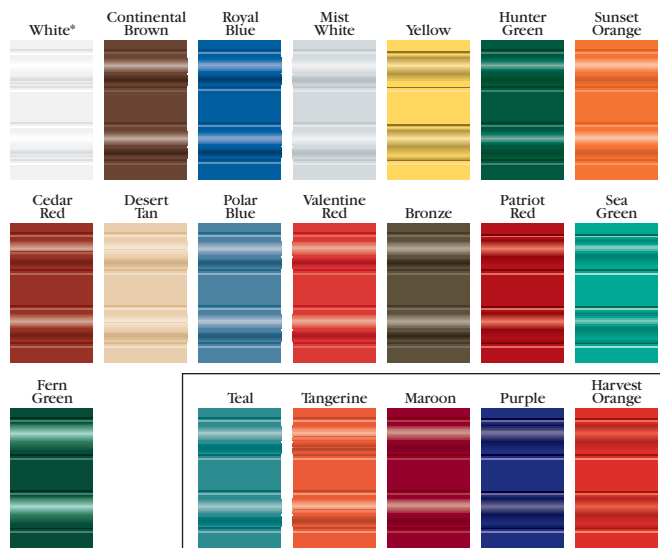

**10 Year Warranty Against Chalk and Fade**

\* White is also available in a Glossy White finish  
 Note: Some colors may have extended lead times. Please consult your local Wayne-Dalton dealer for details.



**Optional direct-drive chain hoist** is available for door sizes up to 12' X 12'.



**Optional viewlights**, only available on uninsulated doors, let occupants see outside without opening the door.




**Optional 4:1 reduced drive chain hoist** is available for door sizes 12'1" X 16'0".



**Optional door insulation** features two layers of aluminum mylar film laminated to two layers of heavy-duty polyethylene air-bubble material. Its "R"-value of 4 helps control heat gain/loss. Includes flexible vinyl top and side draft stops as weather seals between the door and the building.




**Optional electric operator kit** adapts any door to motorized operation.



**Cam-action spring tensioning** device allows easy adjustment of spring tension.



**Optional steel mounting plates** provide lateral extension of jambs.



**Optional Heavy Duty Guide** 13 ga. galvanized G section and 8 ga. galvanized wall angle attaches to wood steel or masonry jambs.

**Warranty:** Wayne-Dalton and its subsidiaries back all of their doors and fittings with a LIMITED WARRANTY against defects in materials and workmanship. Paint has a limited warranty to hold up against weather induced chipping, cracking, and peeling for 25 years. Refer to each color for the number of years warranted not to chalk or change color. A copy of this warranty is available upon request.

Because of continuing product improvements, we reserve the right to change the product specifications and designs without prior notice.

**AWS**

**Absolute Warehouse Services**

**855.838.9449**



www.Wayne-Dalton.com

© 2010 Wayne-Dalton Door & Systems  
 2589 C.R. 168 • Dundee, OH 44624  
 Toll-free: 800-795-5095 • Phone: 330-893-3233 • Fax: 330-893-3371